Q-PALL PLASTIC PALLETS

**Technical specifications**
Datasheet, edition October 2026

1200 x 800 mm · EURO PALLET

# Plastic pallet 1200 x 800 x 145 open deck 3 runners medium – 3.QP1208MB3RR

MEDIUM | Open deck | 3 runners

TOP



BOTTOM



| 5,000 kg | 1,500 kg | 450 kg |
|---|---|---|
| Static load on a flat floor | Dynamic load by forklift or pallet truck | Racking load in pallet racking |

## DIMENSIONS AND WEIGHT

| | |
|---|---|
| Item number | 3.QP1208MB3RR |
| Length | 1200 mm |
| Width | 800 mm |
| Height | 145 mm |
| Weight | 12 kg |

## CONSTRUCTION AND MATERIAL

| | |
|---|---|
| Top deck | Open deck |
| Bottom | 3 runners |
| Load class | Medium |
| Nestable | No |
| Material | Nearly 100% recycled plastic (HDPE/PP) |
| Colour | Black (standard), other colours on request |
| ISPM 15 | Exempt (no treatment needed) |

## DELIVERY AND DOCUMENTATION

| | |
|---|---|
| PPWR (EU 2025/40) | Declaration of conformity available |
| Ordering in stacks | 17 pallets per stack (stack dimensions approx. 1200 x 800 x 2465 mm) |

## SIMILAR VERSIONS


| ITEM NUMBER | DIMENSIONS (MM) | WEIGHT | STATIC | DYNAMIC | RACKING |
|---|---|---|---|---|---|
| 3.QP1208MB3RR This datasheet | 1200 x 800 x 145 | 12 kg | 5,000 kg | 1,500 kg | 450 kg |
| 1.QP1208MB3RR | 1200 x 800 x 145 | 11.4 kg | 5,000 kg | 1,250 kg | 450 kg |
| 2.QP1208MB3RR | 1200 x 800 x 145 | 12 kg | 5,000 kg | 1,250 kg | 450 kg |
| 4.QP1208MB3RR | 1200 x 800 x 145 | 12 kg | 5,000 kg | 1,500 kg | 500 kg |
| 5.QP1208MB3RR | 1200 x 800 x 145 | 12 kg | 5,000 kg | 1,500 kg | 450 kg |

Click an item number for the page and datasheet of that version. We deliver from a factory where your pallet is available, as close to you as possible. Small differences in height, weight and load capacity between the versions are possible.

1200 x 800 mm · EURO PALLET

# Plastic pallet 1200 x 800 x 145 open deck 3 runners medium – 3.QP1208MB3RR

## TECHNICAL DRAWING

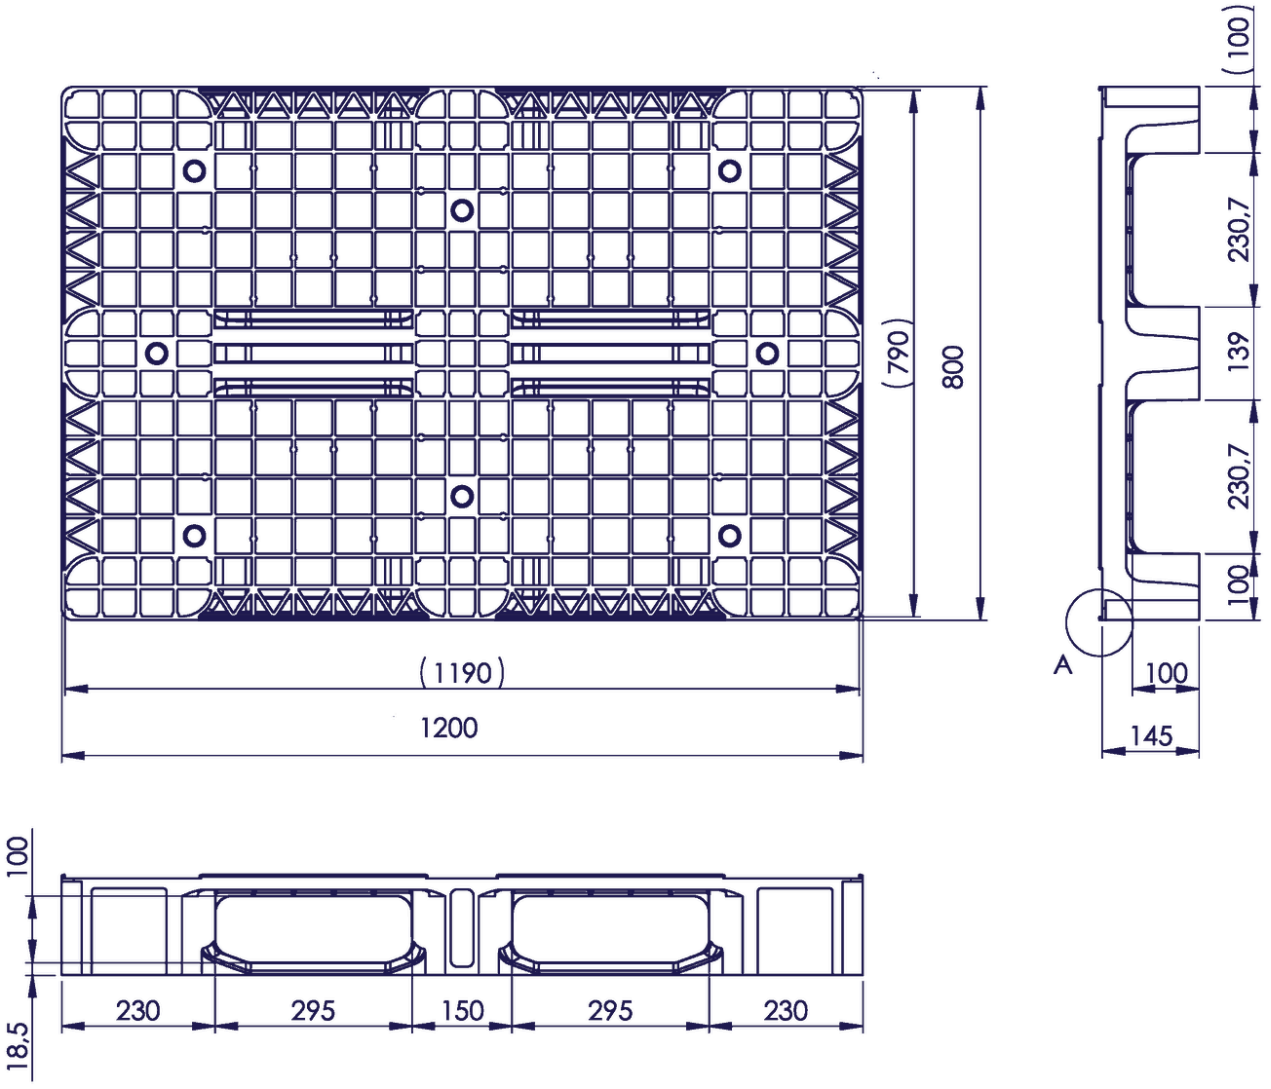


Top view and side views, dimensions in mm.

## TEST CONDITIONS AND TOLERANCES

- The racking load is determined in a test with 25 kg bags on a conventional pallet racking system.
- Dimensional tolerance of the pallet: +5 / -5 mm. Weight tolerance: +5 / -5 %.
- We test our pallets with an evenly distributed, stable and homogeneous load of bagged goods, for a predetermined period at an ambient temperature of 20 °C. Different load conditions may lead to different results and must be assessed separately.