Q-PALL PLASTIC PALLETS

Technical specifications
Datasheet, edition October 2026

1140 x 1140 mm · CP3/CP9 FORMAT

Plastic pallet 1140 x 1140 x 156 open deck 6 runners medium – 2.QP1140MB6RR

MEDIUM | Open deck | 6 runners

TOP



BOTTOM



7,500 kg	1,375 kg	200 kg
Static load on a flat floor	Dynamic load by forklift or pallet truck	Racking load in pallet racking

DIMENSIONS AND WEIGHT

Item number	2.QP1140MB6RR
Length	1140 mm
Width	1140 mm
Height	156 mm
Weight	16.9 kg

CONSTRUCTION AND MATERIAL

Top deck	Open deck
Bottom	6 runners
Load class	Medium
Nestable	No
Material	Nearly 100% recycled plastic (HDPE/PP)
Colour	Black (standard), other colours on request
ISPM 15	Exempt (no treatment needed)

DELIVERY AND DOCUMENTATION

PPWR (EU 2025/40)	Declaration of conformity available
Ordering in stacks	16 pallets per stack (stack dimensions approx. 1140 x 1140 x 2496 mm)

SIMILAR VERSIONS


ITEM NUMBER	DIMENSIONS (MM)	WEIGHT	STATIC	DYNAMIC	RACKING
2.QP1140MB6RR This datasheet	1140 x 1140 x 156	16.9 kg	7,500 kg	1,375 kg	200 kg
3.QP1140MB6RR	1140 x 1140 x 156	16.9 kg	7,500 kg	1,375 kg	200 kg
QP1140MB6RR	1140 x 1140 x 156	16.9 kg	7,500 kg	1,375 kg	200 kg

Click an item number for the page and datasheet of that version. We deliver from a factory where your pallet is available, as close to you as possible. Small differences in height, weight and load capacity between the versions are possible.

1140 x 1140 mm · CP3/CP9 FORMAT

Plastic pallet 1140 x 1140 x 156 open deck 6 runners medium – 2.QP1140MB6RR

TECHNICAL DRAWING

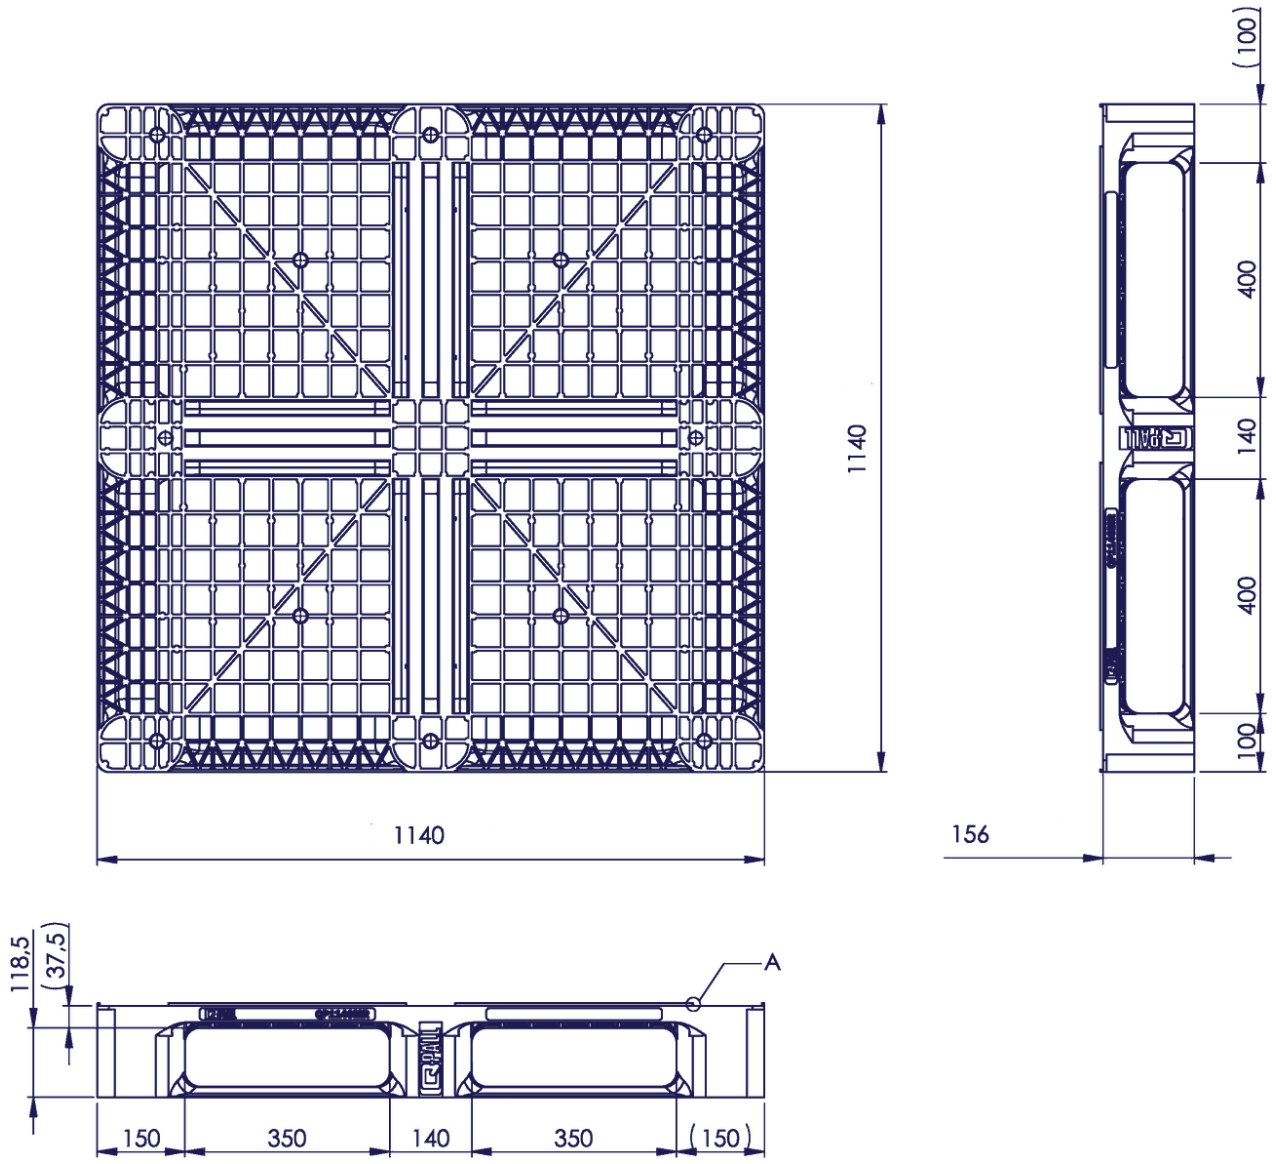

Top view and side views, dimensions in mm.

TEST CONDITIONS AND TOLERANCES

- The racking load is determined in a test with 25 kg bags on a conventional pallet racking system.
- Dimensional tolerance of the pallet: +5 / -5 mm. Weight tolerance: +5 / -5 %.
- We test our pallets with an evenly distributed, stable and homogeneous load of bagged goods, for a predetermined period at an ambient temperature of 20 °C. Different load conditions may lead to different results and must be assessed separately.