Q-PALL PLASTIC PALLETS

Technical specifications
Datasheet, edition October 2026

1200 x 800 mm · EURO PALLET

Plastic pallet 1200 x 800 x 150 closed deck 9 feet light – 3.QP1208LB9FR-CD

LIGHT | Closed deck | 9 feet | Nestable

TOP



BOTTOM



2,500 kg	1,000 kg	–
Static load on a flat floor	Dynamic load by forklift or pallet truck	Racking load Not for racking

DIMENSIONS AND WEIGHT

Item number	3.QP1208LB9FR-CD
Length	1200 mm
Width	800 mm
Height	150 mm
Weight	6.6 kg

CONSTRUCTION AND MATERIAL

Top deck	Closed deck
Bottom	9 feet
Load class	Light
Nestable	Yes
Material	Nearly 100% recycled plastic (HDPE/PP/LDPE)
Colour	Black (standard), other colours on request
ISPM 15	Exempt (no treatment needed)

DELIVERY AND DOCUMENTATION

PPWR (EU 2025/40)	Declaration of conformity available
Ordering in stacks	45 pallets per stack (stack dimensions approx. 1200 x 800 x 2360 mm)

SIMILAR VERSIONS


ITEM NUMBER	DIMENSIONS (MM)	WEIGHT	STATIC	DYNAMIC	RACKING
3.QP1208LB9FR-CD This datasheet	1200 x 800 x 150	6.6 kg	2,500 kg	1,000 kg	–
1.QP1208LB9FR-CD	1200 x 800 x 150	6.3 kg	2,500 kg	1,000 kg	–
2.QP1208LB9FR-CD	1200 x 800 x 149	6.4 kg	2,500 kg	1,000 kg	–

Click an item number for the page and datasheet of that version. We deliver from a factory where your pallet is available, as close to you as possible. Small differences in height, weight and load capacity between the versions are possible.

1200 x 800 mm · EURO PALLET

Plastic pallet 1200 x 800 x 150 closed deck 9 feet light – 3.QP1208LB9FR-CD

TECHNICAL DRAWING

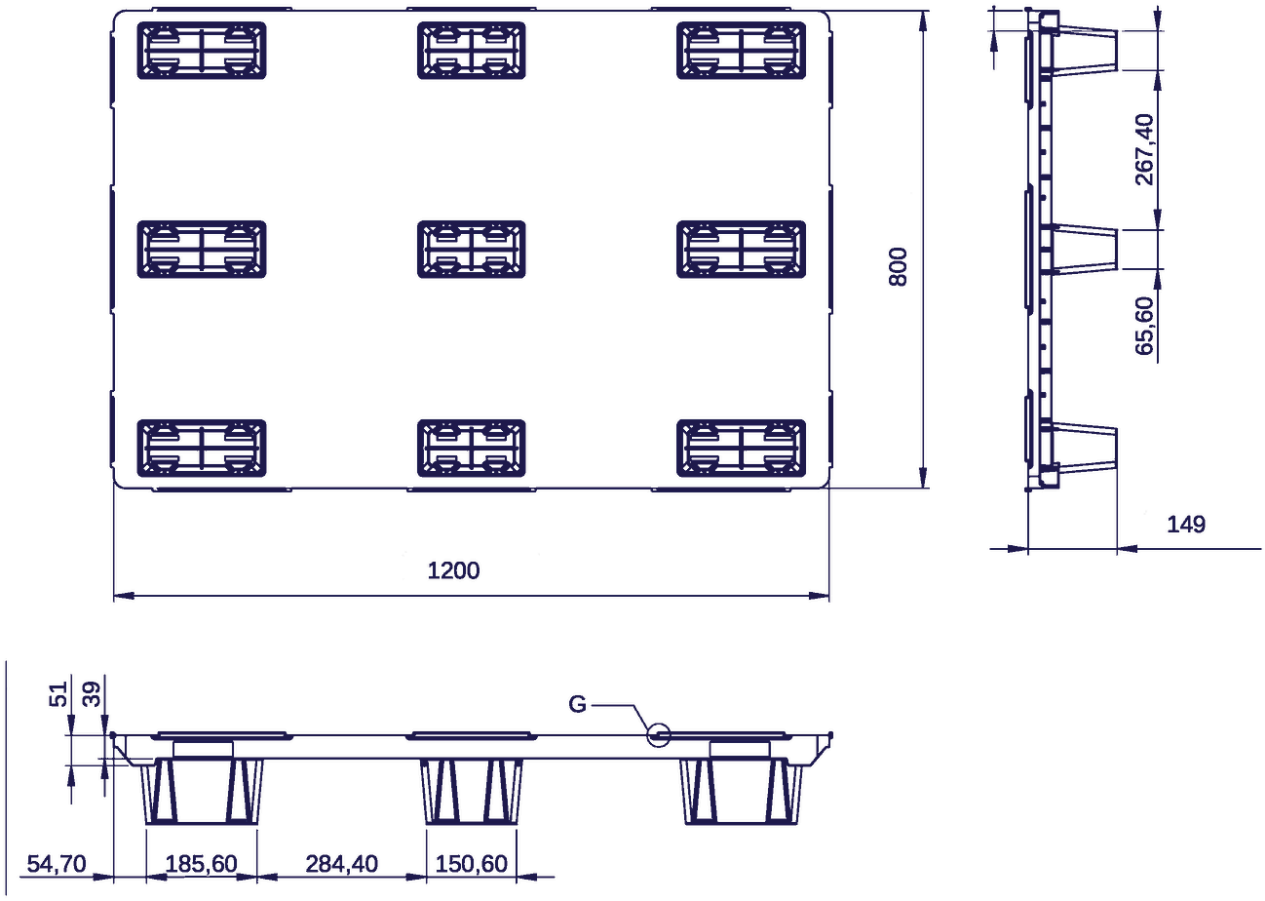

Top view and side views, dimensions in mm.

TEST CONDITIONS AND TOLERANCES

- Dimensional tolerance of the pallet: +5 / -5 mm. Weight tolerance: +5 / -5 %.
- We test our pallets with an evenly distributed, stable and homogeneous load of bagged goods, for a predetermined period at an ambient temperature of 20 °C. Different load conditions may lead to different results and must be assessed separately.