Q-PALL PLASTIC PALLETS

**Technical specifications**
Datasheet, edition October 2026

1200 x 800 mm · EURO PALLET

# Plastic pallet 1200 x 800 x 145 closed anti-slip deck 3 runners medium

MEDIUM | Closed anti-slip deck | 3 runners

TOP



BOTTOM



| 6,000 kg | 1,500 kg | 750 kg |
|---|---|---|
| Static load on a flat floor | Dynamic load by forklift or pallet truck | Racking load in pallet racking |

## DIMENSIONS AND WEIGHT

| | |
|---|---|
| Item number | 5.QP1208MB3R-CD-AO |
| Length | 1200 mm |
| Width | 800 mm |
| Height | 145 mm |
| Weight | 14.8 kg |

## CONSTRUCTION AND MATERIAL

| | |
|---|---|
| Top deck | Closed anti-slip deck |
| Bottom | 3 runners |
| Load class | Medium |
| Nestable | No |
| Anti-slip | Yes |
| Material | Nearly 100% recycled plastic (HDPE/PP) |
| Colour | Black (standard), other colours on request |
| ISPM 15 | Exempt (no treatment needed) |


## DELIVERY AND DOCUMENTATION

| | |
|---|---|
| PPWR (EU 2025/40) | Declaration of conformity available |
| Ordering in stacks | 17 pallets per stack (stack dimensions approx. 1200 x 800 x 2465 mm) |

1200 x 800 mm · EURO PALLET

# Plastic pallet 1200 x 800 x 145 closed anti-slip deck 3 runners medium

## TECHNICAL DRAWING

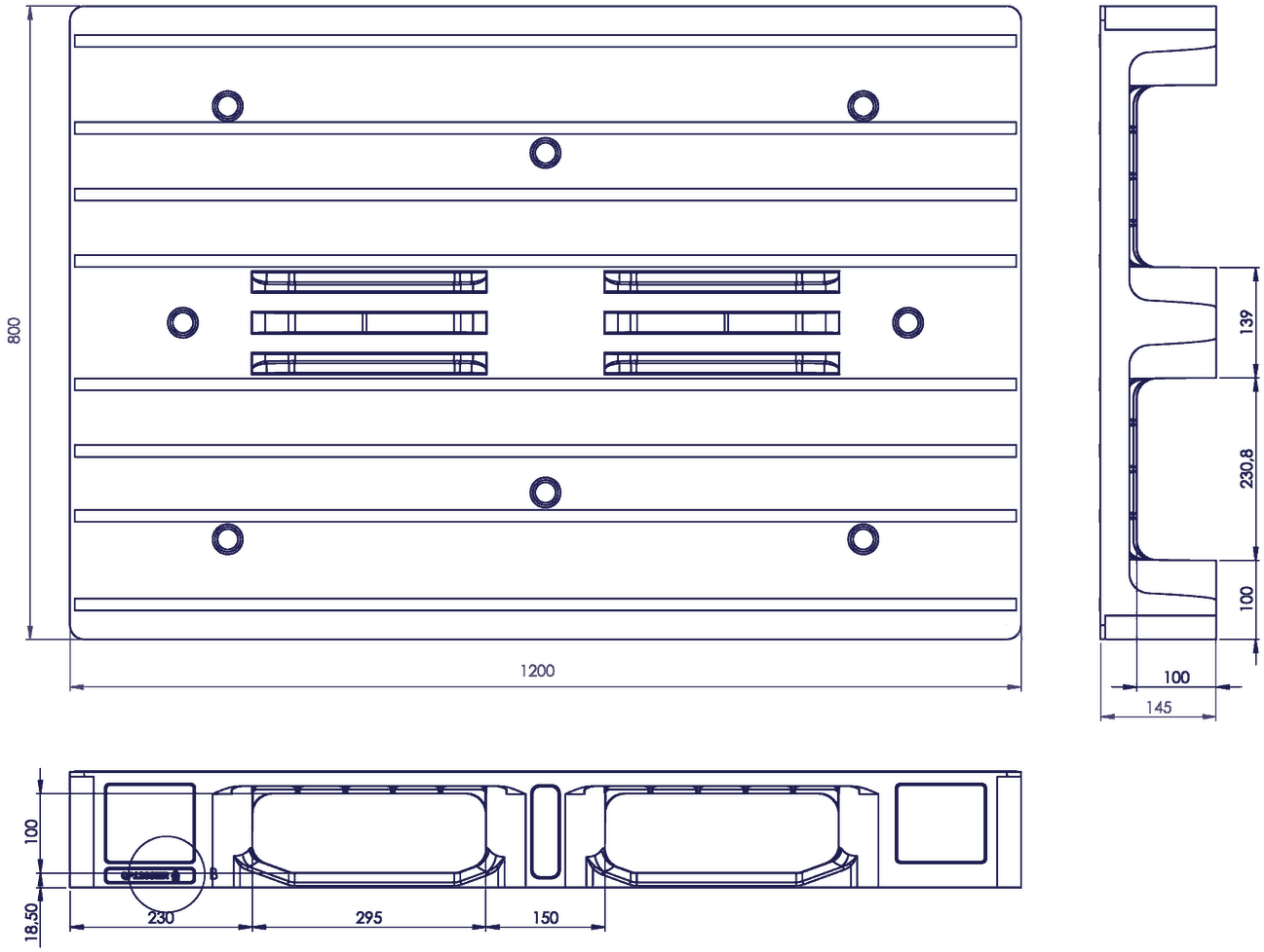


Top view and side views, dimensions in mm.

## TEST CONDITIONS AND TOLERANCES

- The racking load is determined in a test with 25 kg bags on a conventional pallet racking system.
- Dimensional tolerance of the pallet: +5 / -5 mm. Weight tolerance: +5 / -5 %.
- We test our pallets with an evenly distributed, stable and homogeneous load of bagged goods, for a predetermined period at an ambient temperature of 20 °C. Different load conditions may lead to different results and must be assessed separately.