Q-PALL PLASTIC PALLETS

Technical specifications
Datasheet, edition October 2026

1200 x 1000 mm · INDUSTRIAL PALLET

CP6 pallet 1200 x 1000 x 158 open deck 6 runners heavy

HEAVY | Open deck | 6 runners

TOP



BOTTOM



7,500 kg	2,000 kg	1,375 kg
Static load on a flat floor	Dynamic load by forklift or pallet truck	Racking load in pallet racking

DIMENSIONS AND WEIGHT

Item number	2.QP1210HB6RR-CP6
Length	1200 mm
Width	1000 mm
Height	158 mm
Weight	21.5 kg

CONSTRUCTION AND MATERIAL

Top deck	Open deck
Bottom	6 runners
Load class	Heavy
Nestable	No
Material	Nearly 100% recycled plastic (HDPE/PP)
Colour	Black (standard), other colours on request
ISPM 15	Exempt (no treatment needed)


DELIVERY AND DOCUMENTATION

Ordering in stacks	15 pallets per stack (stack dimensions approx. 1200 x 1000 x 2400 mm)

1200 x 1000 mm · INDUSTRIAL PALLET

CP6 pallet 1200 x 1000 x 158 open deck 6 runners heavy

TECHNICAL DRAWING

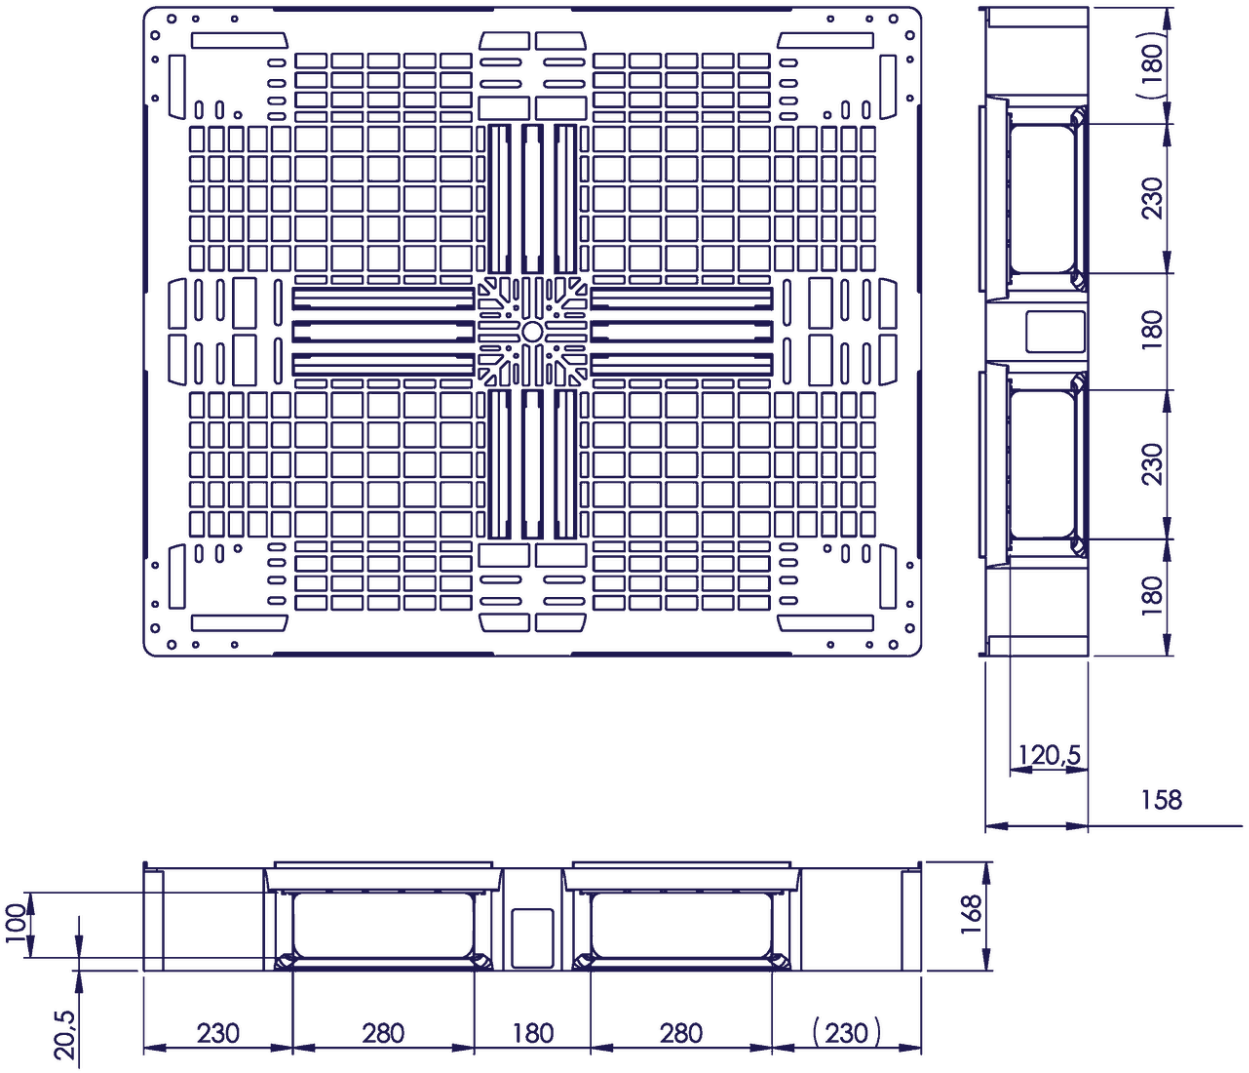

Top view and side views, dimensions in mm.

TEST CONDITIONS AND TOLERANCES

- The racking load is determined in a test with 25 kg bags on a conventional pallet racking system.
- Dimensional tolerance of the pallet: +5 / -5 mm. Weight tolerance: +5 / -5 %.
- We test our pallets with an evenly distributed, stable and homogeneous load of bagged goods, for a predetermined period at an ambient temperature of 20 °C. Different load conditions may lead to different results and must be assessed separately.