Technical specifications
Datasheet, edition October 2026

1200 x 1000 mm · INDUSTRIAL PALLET

Plastic pallet 1200 x 1000 x 150 closed anti-slip deck 5 runners medium

MEDIUM | Closed anti-slip deck | 5 runners

TOP



BOTTOM



6,000 kg	1,500 kg	1,000 kg
Static load on a flat floor	Dynamic load by forklift or pallet truck	Racking load in pallet racking

DIMENSIONS AND WEIGHT

Item number	4.QP1210MB5R-CD-AO
Length	1200 mm
Width	1000 mm
Height	150 mm
Weight	17.5 kg

CONSTRUCTION AND MATERIAL

Top deck	Closed anti-slip deck
Bottom	5 runners
Load class	Medium
Nestable	No
Anti-slip	Yes
Material	Nearly 100% recycled plastic (HDPE/PP)
Colour	Black (standard), other colours on request
ISPM 15	Exempt (no treatment needed)


DELIVERY AND DOCUMENTATION

PPWR (EU 2025/40)	Declaration of conformity available
Ordering in stacks	17 pallets per stack (stack dimensions approx. 1200 x 1000 x 2550 mm)

1200 x 1000 mm · INDUSTRIAL PALLET

Plastic pallet 1200 x 1000 x 150 closed anti-slip deck 5 runners medium

TECHNICAL DRAWING

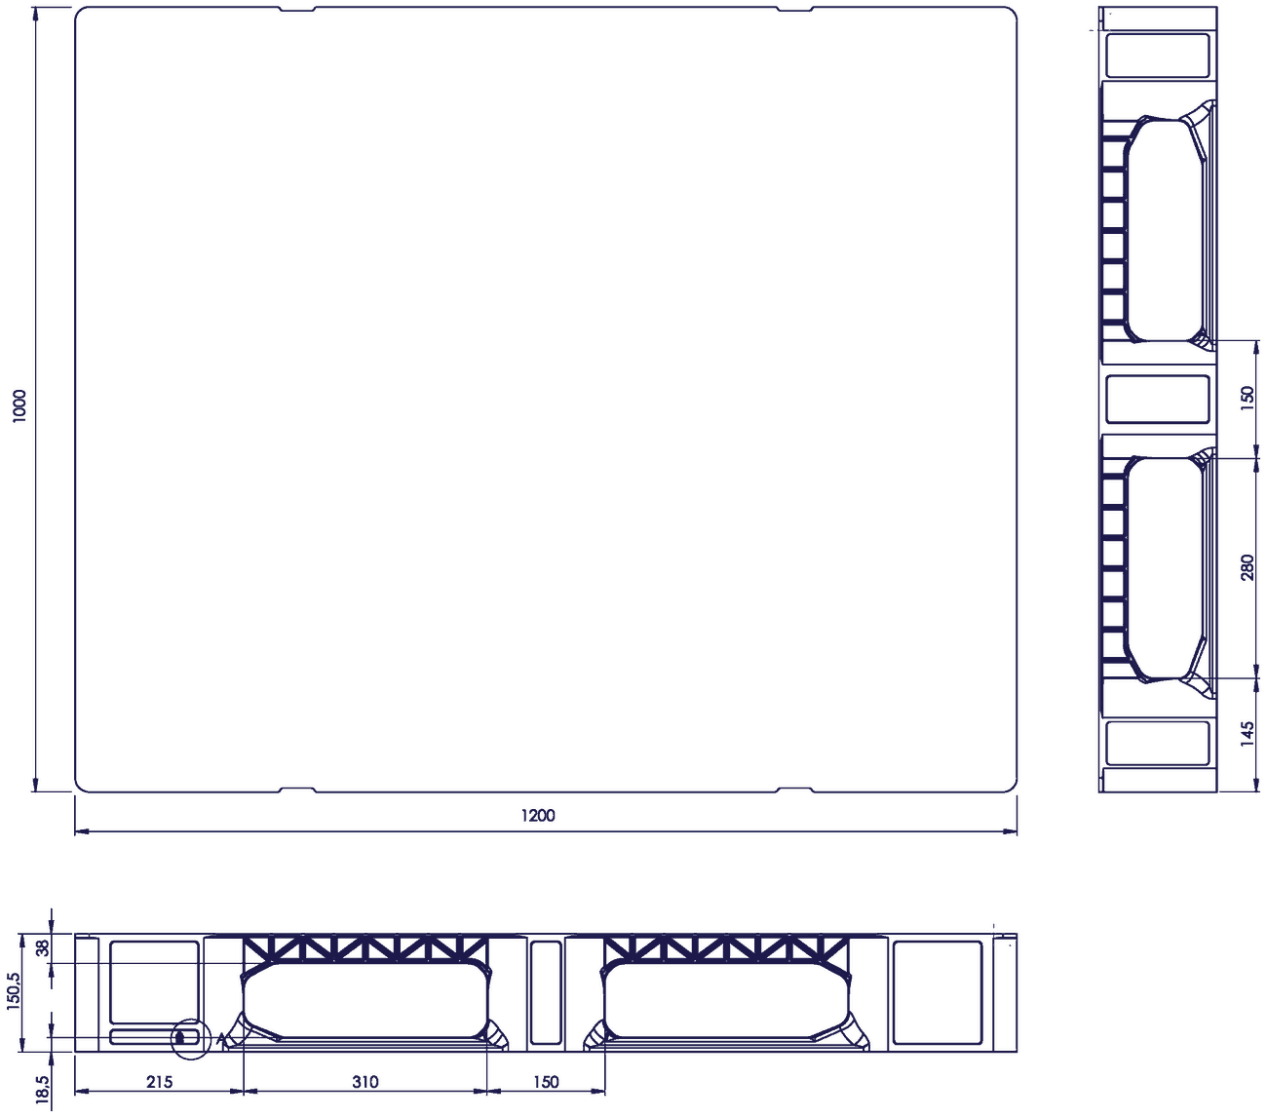

Top view and side views, dimensions in mm.

TEST CONDITIONS AND TOLERANCES

- The racking load is determined in a test with 25 kg bags on a conventional pallet racking system.
- Dimensional tolerance of the pallet: +5 / -5 mm. Weight tolerance: +5 / -5 %.
- We test our pallets with an evenly distributed, stable and homogeneous load of bagged goods, for a predetermined period at an ambient temperature of 20 °C. Different load conditions may lead to different results and must be assessed separately.